# SAY GOODBYE TO DROPPED CALLS WITH WILSON'S NEW SIGNAL DIST DI AMPLIFIER





## SIGNALBOOST™ DT

# CELLULAR PCS

## Dual Band 800/1900 MHz Desktop Amplifier



801247



#### FEATURES

- · Amplifies signals to and from cell site
- Up to 2000 mw output power to the cell site
- · Wireless operation
- Works with Cellular and PCS carriers in USA, Canada and Latin America
- Supports multiple phones/data cards
- · Attractive, sleek design
- · Automatic oscillation/overload protection
- FCC and IC type accepted

### S P E C I F I C A T I O N S

Part Number	801247
Frequency	824-894 MHz / 1850-1990 MHz
Gain	56 dB / 56 dB
Max Output Power	1.3 watts
Max RF (up/down)	31.1 dBm / +9.5 dBm
Noise Figure	3.5 dB nominal
Flatness	±5 dB
Isolation	> 90 dB
Power Requirements	120-240 V AC, 50-60 Hz, 8 W
Connectors	TNC Female / F-Female
Dimensions	6.2 x 4.2 x 1.5 (inch) 15.7 x 10.7 x 3.8 (cm)
Weight	0.64 lbs / 0.29 kg


### INCLUDES

- Outdoor / window directional 5 dB cradle antenna
- · Omni-directional inside antenna
- 50' of RG6 cable (in 20' and 30' lengths)
- · All mounting hardware

**BEST** 

- AC power supply
- · Installation guide



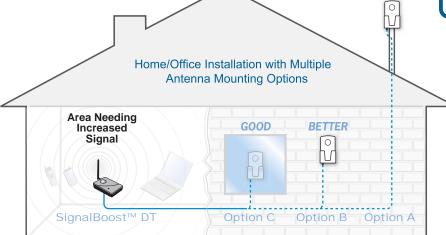

#### **Outside Antenna Mounting Options**

- Outdoor pole mount option.
- Cutdoor wall mount option.
- Indoor window mount option.